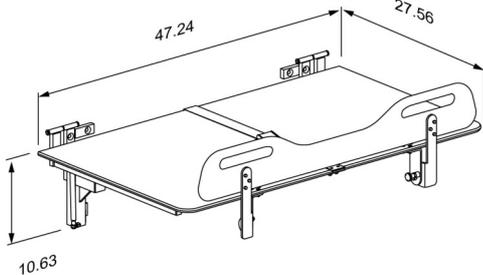




<p>Product</p> <p>Item number</p>	<p>CT 5000 change table, fixed height</p> <p>R8455512000</p>
<p>Color</p> <p>Product description</p>	<p>VVS: 777540820</p> <p>EAN: 5708590376585</p> <p>HMI: 138135</p> <p>FDA: INT/D124320</p> <p>White</p>  <p>Pressalit offers a variety of mobile and wall-hung, height-adjustable and fixed height shower and changing tables of high quality. They are designed to provide a stable platform for showering and changing adults and children with reduced mobility. These tables can be used in schools, institutions, hospitals and private homes and are all designed to be durable, comfortable and easy to clean. The design and flexibility of the tables ensures optimal working conditions for the carer as well as a high level of comfort and safety for the user.</p> <p>CT 5000 change table, lying surface in compact laminate, 27.6" x 47.2" , white. With safety rail and body belt, foldable, fixed height, wall-mounted.</p>
<p>Adjustability</p> <p>Adjustment height</p> <p>Product capacity</p>	<p>Fixed mounting</p> <p>Maximum user weight (MUM): 331 lbs.</p> <p>Maximum load (SWL): 331 lbs.</p> <p>When the table is loaded with 331 lbs, each mounting bolt supports 115 lbs.</p> <p><i>This product has been tested statically with a load of 496 lbs as the ISO 17966 standard requires testing with a safety factor 1.5.</i></p>
<p>Materials</p> <p>Ergonomy</p>	<p>Powder-laquered stainless steel, lying surface in compact laminate.</p> <p>The ergonomically designed safety rail has a practical lower central section, which provides better access and work environment for the carer while transferring, changing and dressing the user.</p> <p>Easy to clean, smooth contact surfaces which do not collect dirt and bacteria.</p>













Product	CT 5000 change table, fixed height
Item number	R8455512000
Warranty	Pressalit makes a commitment to remedy material and manufacturing defects for a period of three years from the invoicing date.
Cleaning	<p>This product should be cleaned with hot water or a mild cleaning solution. Do not use chlorine based, corrosive or abrasive cleaners as it may result in the surface being damaged.</p> <p>The following cleaning agents have been tested by Pressalit and may be used, as long as they are diluted according to the instructions on the container.</p> <p>DISINFECTANTS: Clinimax Difficil-S Erisan OXY+ Sprit (husholdningssprit) Suma Bac D10 Virkon Rodalon Desinfektionsspray Lysoformin Spezial CaviCide Sufanios Premium Tvättsprit 70% Accel PREvention Wipes Lingettes</p> <p>NON-DISINFECTANTS: Suma Star free D1 Taski 100 Taski 200 Milizid Citro</p> <p>The product must be wiped down with a soft rag wrung out in clear water immediately after cleaning, as some materials may otherwise be discolored and stained, and the surface coating may deteriorate.</p>
Declaration of conformity	This product is in compliance with all relevant requirements of regulation (EU) 2017/745 on medical devices.






Product	CT 5000 change table, fixed height
Item number	R8455512000

Mounting in different wall types

	Concrete >B25 Mounting kit, 2 lag bolts Ø10 x 70 and 2 countersunk bolts Ø10 x 80	
	Solid Brick >= Mz12 Mounting kit, 2 lag bolts Ø10 x 70 and 2 countersunk bolts Ø10 x 80	
	Solid Sand Lime Brick >= Hlz12 Mounting kit, 2 lag bolts Ø10 x 70 and 2 countersunk bolts Ø10 x 80	
	Aerated Concrete P4 Mounting kit, 2 lag bolts Ø10 x 70 and 2 countersunk bolts Ø10 x 80	
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with wood Mounting kit, 2 lag bolts Ø10 x 70 and 2 countersunk bolts Ø10 x 80	



Product Item number	CT 5000 change table, fixed height R8455512000
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with 22 mm plywood Mounting in this wall type is not recommended - risk of fatal injury to persons and walls. 
	Drywall (2 x 12,5 mm) water-resistant, re-enforced with steel plates (.08 inch) Mounting in this wall type is not recommended - risk of fatal injury to persons and walls. 
	Drywall (2 x 12,5 mm) water-resistant Mounting in this wall type is not recommended - risk of fatal injury to persons and walls. 

Bolts for wall fixing are included. It is the responsibility of the installer to ensure that suitable plugs are used. Please see mounting instruction.